
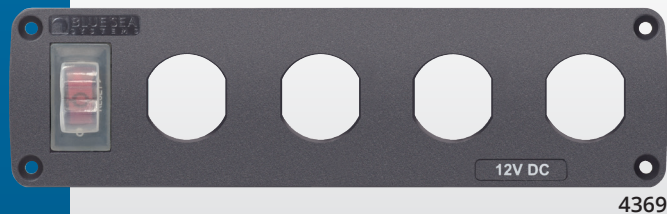


# Water-Resistant Accessory Panels

Easy to install accessory panels include a 15A circuit breaker switch and pre-wired harness. Panels offer customizable 12V charging and monitoring options

- Water-resistant IP66 when mounted and gasket in place
- Silicone breaker boot and EPDM mounting gasket protects against water ingress
- Carling Technologies Illuminated "ON" indicating 15A circuit breaker switch allows the ability to shut off panel preventing parasitic draw
- Polycarbonate/ABS panel face is UV-stabilized, flame retardant, and will not corrode
- 12V DC only

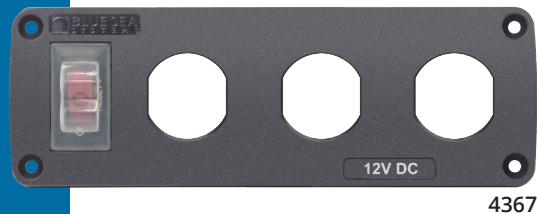

## Related Products



2.1A Dual USB  
Chargers



4.8A Dual USB  
Chargers



12V Socket







Mini OLED Meters

# Specs

Part #	Description	Width in (mm)	Height in (mm)	Depth in (mm)
4363	15A Circuit Breaker, 12V Socket, 2.1A Dual USB Charger	4.94 (125.4mm)	2.25 (57.2mm)	2.53 (64.3mm)
4364	15A Circuit Breaker, 2x Blank Apertures	4.94 (125.4mm)	2.25 (57.2mm)	Based on installed accessories
4365	15A Circuit Breaker, 12V Socket, 2x 2.1A Dual USB Chargers	6.61 (168.0mm)	2.25 (57.2mm)	2.53 (64.3mm)
4366	15A Circuit Breaker, 12V Socket, 2.1A Dual USB Charger, Mini Voltmeter	6.61 (168.0mm)	2.25 (57.2mm)	2.75 (69.8mm)
4367	15A Circuit Breaker, 3x Blank Apertures	6.61 (168.0mm)	2.25 (57.2mm)	Based on installed accessories
4368	15A Circuit Breaker, 12V Socket, 2x 2.1A Dual USB Chargers, Mini Voltmeter	8.29 (210.5mm)	2.25 (57.2mm)	2.75 (69.8mm)
4369	15A Circuit Breaker, 4x Blank Apertures	8.29 (210.5mm)	2.25 (57.2mm)	Based on installed accessories

## Regulatory

Panel front is IP66 when mounted with gasket in place - protected against powerful water jets  
4364, 4367 & 4369 are CE certified

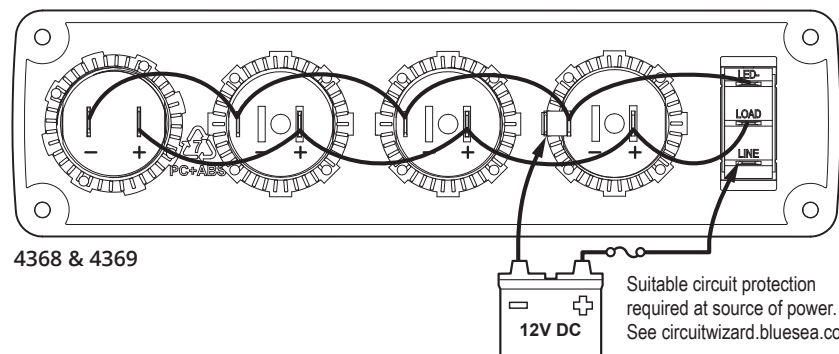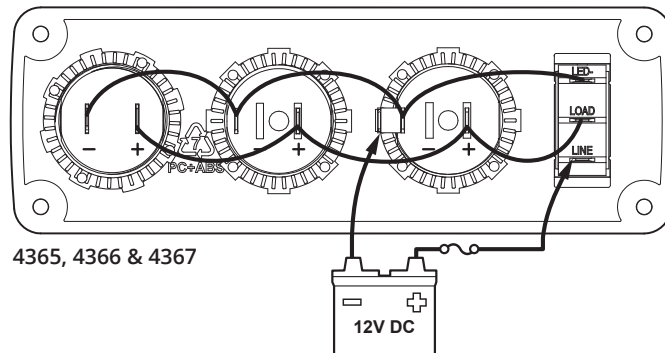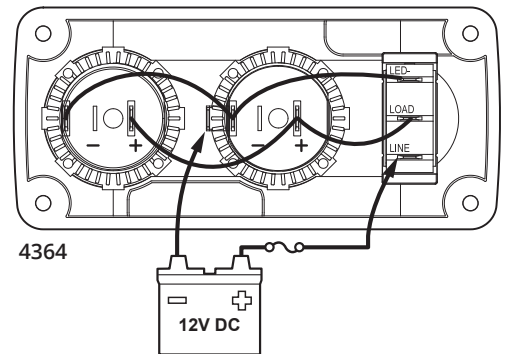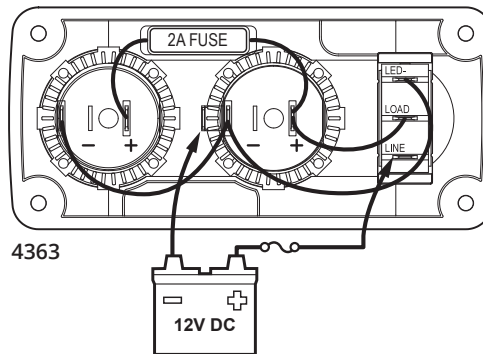

Suitable circuit protection required at source of power. See [circuitwizard.blueseasystems.com](http://circuitwizard.blueseasystems.com).

Specifications subject to change. See [blueseasystems.com](http://blueseasystems.com) for current information.